



BARYL™ RACK

Barrel Jack Mounting Bracket Installation Instructions



What is in the kit:

- 1- Baryl Rack barrel jack mounting bracket
- 4- Tie Wraps
- 1- Alcohol Cleaning Pad

1. Find the right location:

Spend some time finding a convenient mounting location. *Once installed the Baryl Rack is difficult to reposition.*

Here the passenger is locating the Baryl Rack for mounting a heated jacket barrel jack. She positions it within easy reach when seated in a comfortable riding position. This will allow her to plug in her jacket single-handed without having to look down to find the jack. The highway bar is just the right place to provide a solid, easy mounting surface.



2. Mount the jack to the Baryl Rack:

Place the jack in the Baryl Rack saddle. When installing a Baryl jack be sure the Baryl jack extends far enough above the top of the Baryl Rack saddle to install the Baryl Plug.

Hint: install the Baryl Plug into the Baryl jack when positioning it to ensure proper clearance.

Install the cable ties; one in each of grooves of the saddle. Pull the cable ties tight!



3. Using the alcohol swab provided, clean the surface where the Baryl Rack is to be mounted.

4. Strip the release liner from the adhesive strip on the back of the Baryl Rack and carefully position the Baryl Rack.


Press firmly on all surfaces to ensure a good bond. If the Baryl Rack is being installed on a handle bar, highway bar or other round surface, install two tie wraps as shown. Align the edge of the tie wrap with the small ribs at the outer edge of the Baryl Rack backing segments and then continue around the bar. Note: These tie wraps may be removed after the adhesive cures (about 72 hours).

Hint: For a more robust installation leave the long tie wraps in place. Be sure that the barrel jack does not hinder removal of panels otherwise you will have to cut the tie wraps for panel removal.



5. Adjust the angle of the Baryl Rack saddle for ease of access.

For the best adhesive bond the Baryl Rack should be installed at temperatures above 70° F (21°C).

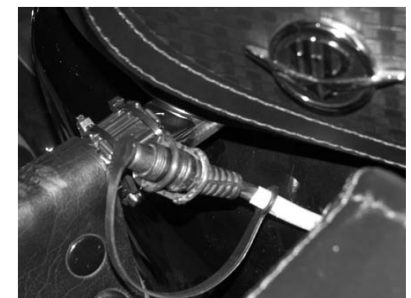

3BR Powersports, LLC

PO Box 2798

Saratoga, CA 95070

www.3brpowersports.com



Made in USA, Patent Pending